


Plat of Survey in Section 13 & 7 N. R. 1 West, and also in Sec. 18 Town 7 N. R. 1 East in Monroe County and made May 23, 24, & 25 1867 at the request of James Kneally - Lines and Corners established as per plat and field notes -

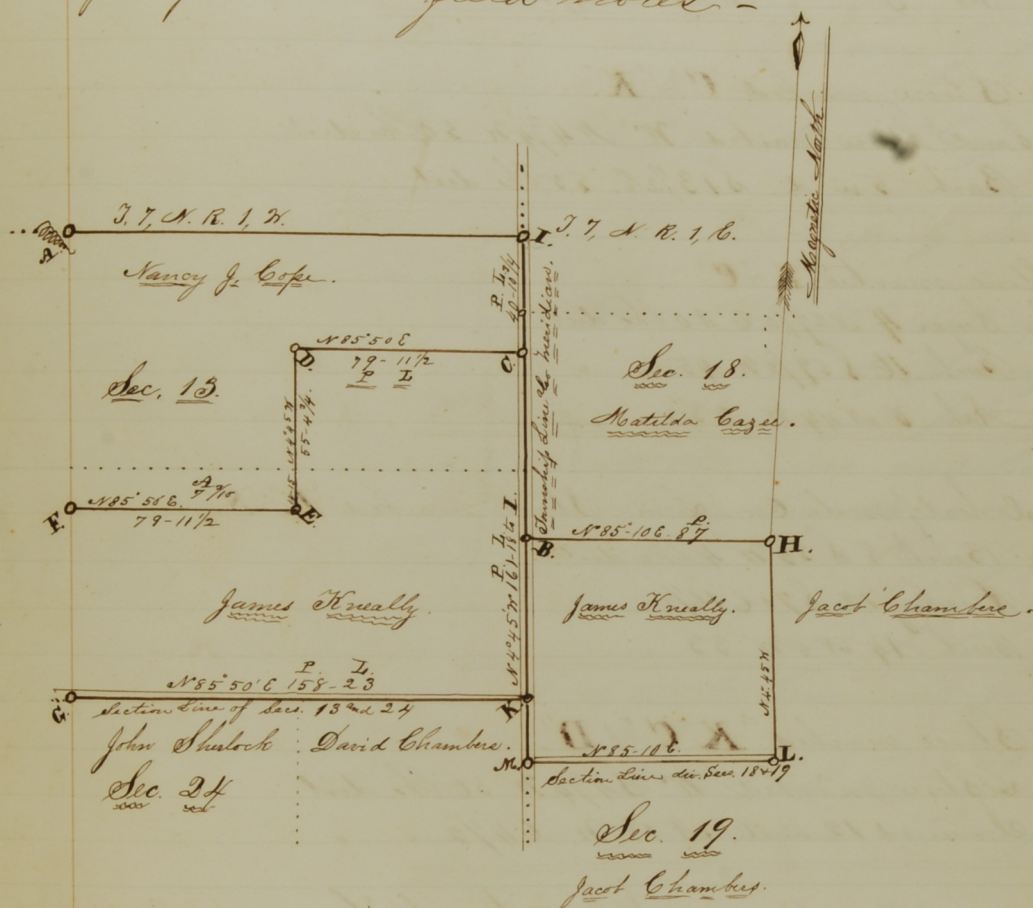

Established the following Corners to wit:

At **K**. Original Corner, planted a Sand Stone marked "K" & "C".

Witnessed by W. Oak 20 in. di. N. 65° E. 4 lks. dist.

" " Beech 5 " " S 84° W 4 1/2 " "

" " W. Oak 10 " " S 17 1/2° W 23 1/2 " "

C. Sand Stone, marked "K" "C" "C".

Wit. by Beech 18 West 25 lks. dist.

" " Walnut 3 N 16 1/2° E 24 " "

" " " 4 N 62 1/2° E 23 " "

" " Dogwood 8 S 34 1/2° W 41 " "

I. Original half mile C. W. Hickory 24 in di. Corner

Wit. by Ironwood 5 1/2 in di. S 38 1/4° W 15 1/2 lks. dist.

" " Do. 5 1/2 " " N 31° W 33 " "

" " Sugar 15 " " N 59° E 37 " "

Over